


## Features

- Non-maintained LED emergency luminaire
- Hidden 'push-to-test' switch for manual testing
- Built in LED charge indicator
- Pre-wired for simple installation
- 3 hour emergency duration
- DALI/self test option available

## Technical Drawing

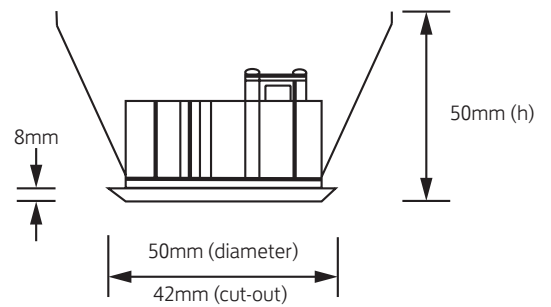

|           |                                     |
|-----------|-------------------------------------|
| <b>DC</b> | Declaration of Conformity available |
|-----------|-------------------------------------|

## Ordering Information

| Model Ref.  | Output (lm) | Power (W) |
|-------------|-------------|-----------|
| <b>ILEM</b> | 188         | 3.5       |

## Options

Please select from the options below.

|             |                |
|-------------|----------------|
| <b>/DST</b> | DALI/Self-test |
|-------------|----------------|




### Spacing Guide (based on a 2m width of escape route)

Spacing Table

| Mounting Height (m) | Axial / Wall (m) | Axial / Axial (m) | Axial / Transverse (m) | Transverse / Transverse (m) | Transverse / Wall (m) |
|---------------------|------------------|-------------------|------------------------|-----------------------------|-----------------------|
| 2.0                 | 3.29             | 8.45              | 8.45                   | 8.62                        | 3.48                  |
| 2.5                 | 3.70             | 9.27              | 9.22                   | 9.31                        | 3.71                  |
| 3.0                 | 3.73             | 10.03             | 9.75                   | 10.07                       | 3.85                  |
| 3.5                 | 3.77             | 10.56             | 10.35                  | 10.46                       | 3.93                  |

Please be aware that these are a minimum guide in accordance with BS/EN 1838. Local risk assessment by a competent person should be carried to ensure the emergency lighting system meets the requirements of the building and its occupants. Photometric data files are available for further information.

### Independent LED EM Module

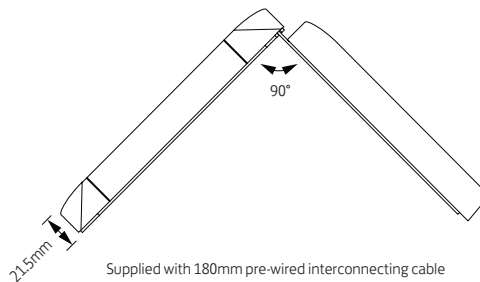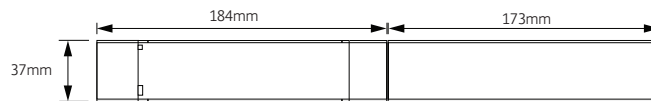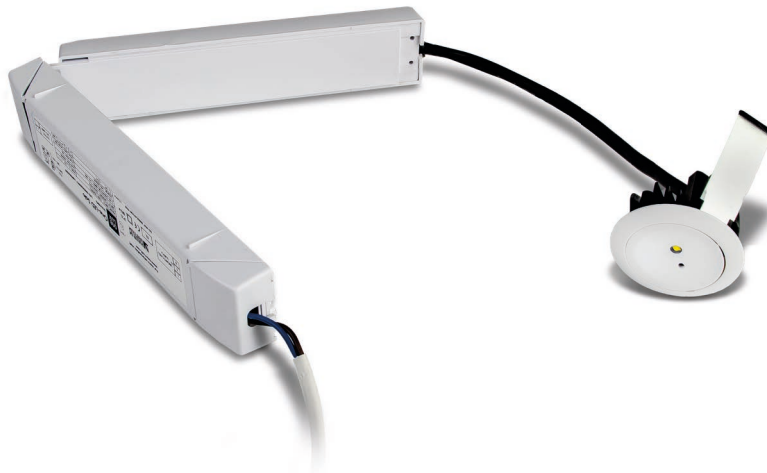

Thornhill Road Business Park  
Tenter Fields, Dewsbury  
West Yorkshire  
WF12 9QT  
+44 (0)1924 482777  
www.gamma-uk.com

