

# INSTALLATION GUIDE:

150 mm LED SCOOP  
990.0383.01



## IMPORTANT:

The luminaire must not be covered by any debris or insulating material. Ensure there is a minimum of 50 mm airspace around the luminaire and control gear. Electrical termination must be carried out by a qualified electrician in accordance with the latest edition of IEE wiring regulations BS7671.


**NOTE: THE LED MODULES IN THIS LUMINAIRE ARE NON-USER REPLACEABLE.**

**PLEASE RETAIN THIS GUIDE FOR FUTURE REFERENCE AND RECYCLE PACKAGING.**

### A




**ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION**




- Cut a 140 mm circular hole at the desired location using a holesaw.

### B

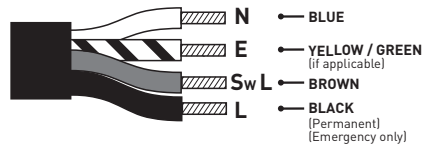


- Connect the luminaire to the mains supply using a terminal block (not supplied) compliant with the requirements of EN60998-2-1 or 2-2.
- For Touch & Dim wiring see instruction leaflet **990.0009.01**.
- For DALI wiring see instruction leaflet **990.0028.01**.

### C



- Offer the driver into the ceiling void.


### D



- Adjust the luminaire head to the required position. The head resistance can be adjusted using the brake screw if necessary.

### E

- Tension both springs into the upright position and offer the luminaire up into the hole in the ceiling.

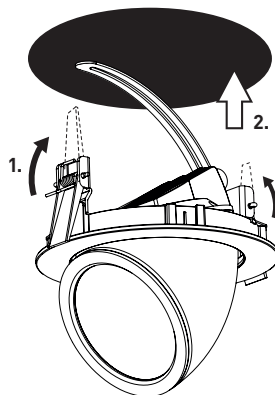

**REINSTATE MAINS SUPPLY**