




Key Features

- LED IP65 anti-corrosive batten with IK10 impact resistance rating
- Robust injection moulded polycarbonate body
- Clear vapour-proof high impact diffuser
- High system efficacy to aid compliance with Building Regulations Part L
- Tridonic LED and driver system
- Opal light pipe for homogeneous output
- Quick release flush mounted fixing clips
- Adjustable 1.5 m suspension kit and corner mount kit available
- Dimming, sensor and emergency options

Technical Drawing

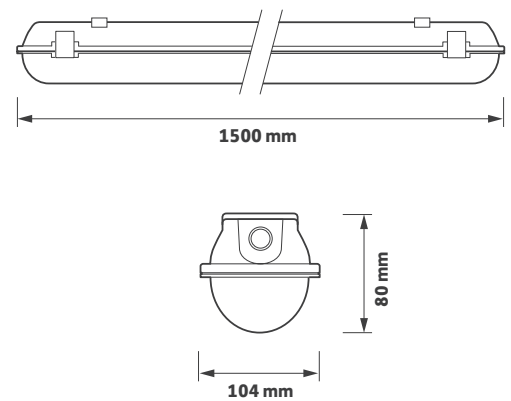

Declaration of Conformity available

Ordering Information

Luminaire Output (lm)	Power (tcW)	Colour	Size (mm)	Model Ref.
2775	19	830	1500	ABI007
2900	19	840	1500	ABI008
5250	36	830	1500	ABI003
5500	36	840	1500	ABI004


Options

Please select from the options below.

SwitchDIM, DALI or DSI	/ECO
EM conversion	/EM
DALI EM conversion	/EMD
Sensor on / off **	/SO
Stainless steel clips	SC129/14
Corner mount kit	CMK129
1.5 m suspension kit	SUS129
Sensor programming remote	SPR129

** Not available with **/ECO**

Options




/ECO
SwitchDIM, DALI or DSI



/EM
EM conversion



/EMD
DALI EM conversion



/SO
Sensor on / off
(Not available with /ECO)

Accessories




SC129/14
14 pack stainless steel clips
(1500 mm)



SUS129
1.5 m suspension kit




CMK129
Corner mount kit



SPR129
Sensor programming remote
(Required to change standard
sensor settings)

/SO - Sensor Detection Range

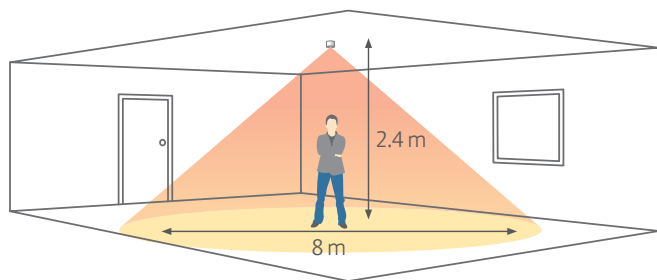

Also Available

PRODUCT
PV
VARIATION

Product variations
Other specifications available on
request