

EMBULK


DATASHEET



Key Features


- IP65 rated LED maintained emergency bulkhead
- 1 x 3.6 V 1.5 Ah NiCad battery - 3 hours duration
- Compliant with EN 60598.2.22
- White polycarbonate base and clear fresnel lens

Technical Drawing

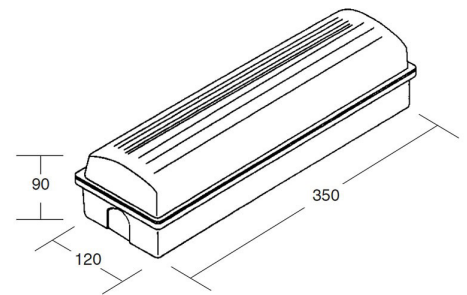

Ordering Information

Luminaire Output (lm)	Power (tcW)	Colour (K)	Model Ref.
150	3	4 - 5000	EMBULK



Emergency Lighting Spacings

Mounting height (m)	Trans. to wall	Trans. to trans.	Axial to trans	Axial to axial	Axial to wall	
2.5	1.6	5.9	4.3	3.0	1.0	1 lux min. at centre
4.0	1.1	4.7	3.6	2.6	0.4	
2.5	1.6	8.7	7.2	4.7	1.2	0.5 lux min. (open)
4.0	1.1	8.5	7.0	4.5	0.6	

Options

DALI / Self-test	/EMD
Adhesive legend kit (left-right-up)	/ISO

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com

