


EMSPOT

DATASHEET



GAMMA
ILLUMINATION

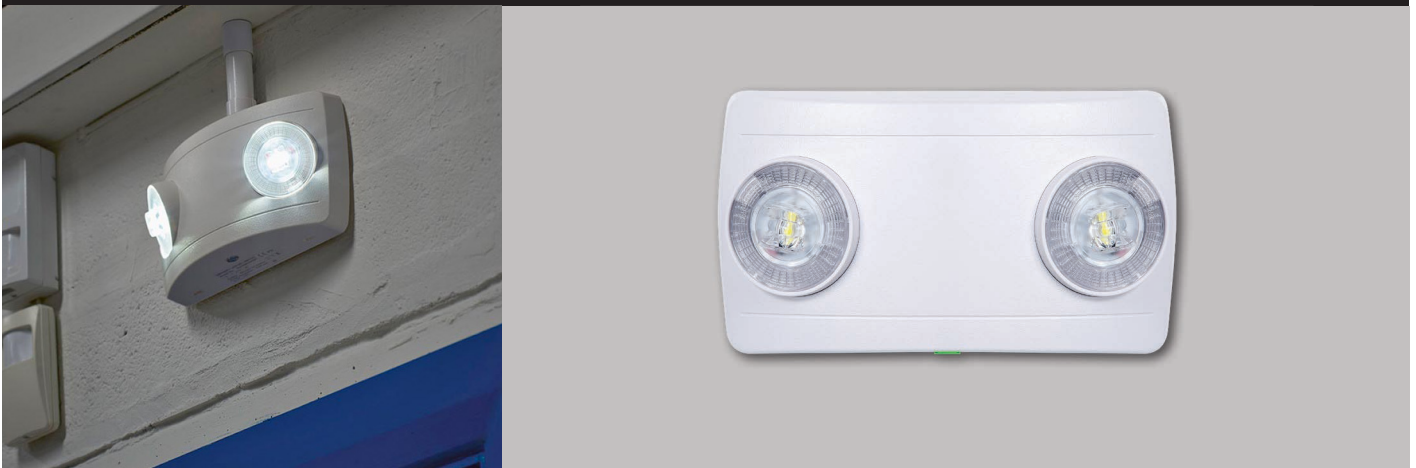

Key Features

- A wall or surface mounted maintained emergency spot
- Adjustable twin high intensity LED projectors
- Batteries - 2 x 3.6 V 1.5 Ah NiMH - 3 hours duration
- Compliant with EN 60598.2.22
- Polycarbonate body and lenses
- 20 mm cable entry knock-outs (top and back)
- Can be spaced 14 m apart to achieve 1 lux on a corridor centre line when ceiling mounted at 2.5 m high
- Can be aimed to provide 5 lux when mounted within 2 m of exit signs, call points or first aid points
- Can be spaced 10 m apart to achieve 0.5 lux in an open area when ceiling mounted at 2.5 m high

Technical Drawing

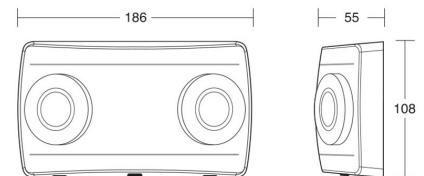

Ordering Information

Luminaire Output (lm)	Power (tcW)	Colour (K)	Model Ref.
2 x 110	2 x 2 W	5000	EMSPOT

Options

Wide beam lens /WB

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



FS 593079



Please note: specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. GDS-394-REV1 19/06/2019