


LUXRITE - CH



DATASHEET

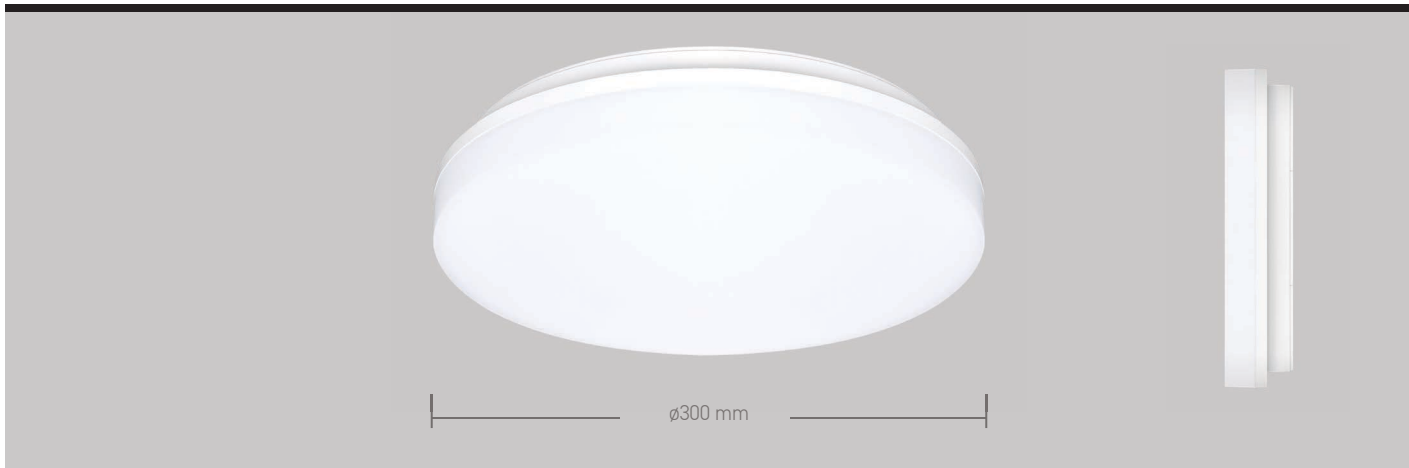

Key Features

- IP54 IK10 LED Bulkhead
- 180° light distribution
- Opal TP(a) polycarbonate diffuser
- SMD LED and integral driver
- Life 50,000h L70
- Switchable 3 x CCT 830, 840, 855
- Suitable for ceiling or wall mounting

Technical Drawing

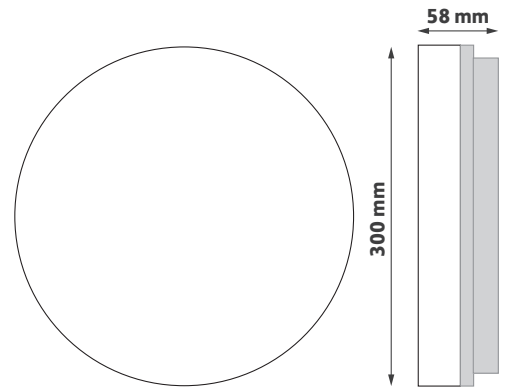

Ordering Information

Delivered Output (lm)	Absolute Power (tcW)	Colour Temperature K	Model Reference
2700	25	3000, 4000, 5500	CH001

If you require **EM** or **sensor** options please refer to our **Duro AJI** or **Duro AFG** bulkheads.

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



FS 593079

