

FIT - CE

DATASHEET

GAMMA
ILLUMINATION





ø110mm

Key Features

- Mini Commercial IP54 Downlight
- Low glare specular reflector
- SMD LED powered by Tridonic
- Die cast heatsink and RAL9016 bezel
- Lumen maintenance L70 / B50 @ 50,000 hours
- Switchable 3 x CCT 830, 840, 855
- Dimming, DALI and EM options

Technical Drawing

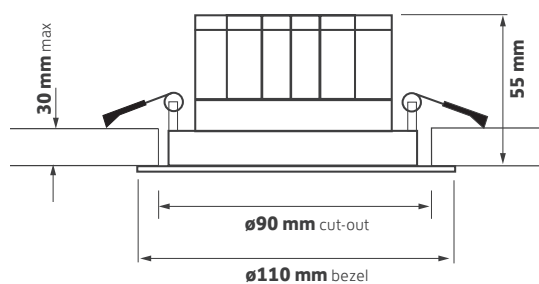

Ordering Information


Delivered Output (lm)	Absolute Power (tcW)	Colour Temperature K	Model Reference
675	9	3000, 4000, 5500	CE001

Options


Please select from the options below.

Mains dimming	/MDIM
SwitchDIM, DALI or DSI	/ECO
Casambi wireless network	/BTC
EM conversion	/EM
DALI and self test EM conversion	/EMD

Options

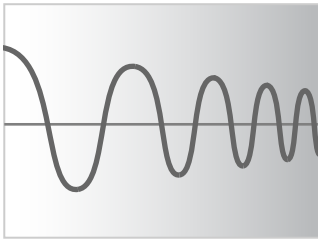

/MDIM
Phase-cut mains dimming



/ECO
SwitchDIM, DALI or DSI



/BTC
Casambi wireless network
(inc dim)



/EM
3 hour emergency conversion



/EMD
3 hour self-test and DALI
emergency conversion