
TITAN - ABE

DATASHEET






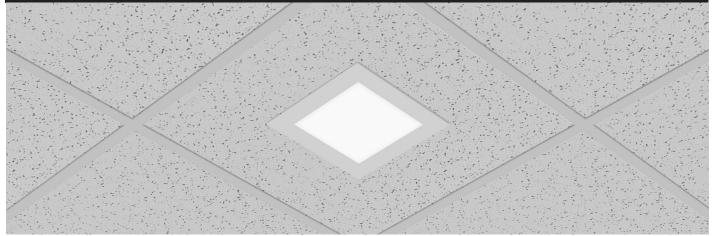

Key Features

- IP54 LED back lit light box
- Ultra-thin bezel designed to minimise visual impact
- IP54 high transmission acrylic diffuser
- Uniform light distribution
- Incorporating Tridonic CLE module and driver
- Excellent system efficacy to aid compliance with Building Regulations Part L2
- Lumen maintenance L80 / F10 @ >72,000 hours
- Short circuit, overload and temperature protection

Technical Drawing













Declaration of Conformity available

Ordering Information

Model Ref.	Colour	Power	Luminaire Output	
		(tcW)	(llm)	
ABE001	830	6	475	
ABE002	840	6	500	
ABE003	830	10	1075	
ABE004	840	10	1125	
ABE005	830	15	1475	
ABE006	840	15	1550	

Options

Please select from the options below.

	SwitchDIM, DALI or DSI	/ECO
	3 hour EM conversion	/EM
	DALI and self-test EM conversion	/EMD
	Casambi wireless network	/BTC

TITAN - ABE OPTIONS AND ACCESSORIES





Options



/ECO SwitchDIM, DALI or DSI



/EM 3 hour EM conversion



/EMDDALI and Self-test EM conversion



/BTCCasambi wireless network (inc dim)







