


FAME - ABA SINGLE

DATASHEET


TRIDONIC
TECHNOLOGY
INSIDE

GAMMA
ILLUMINATION

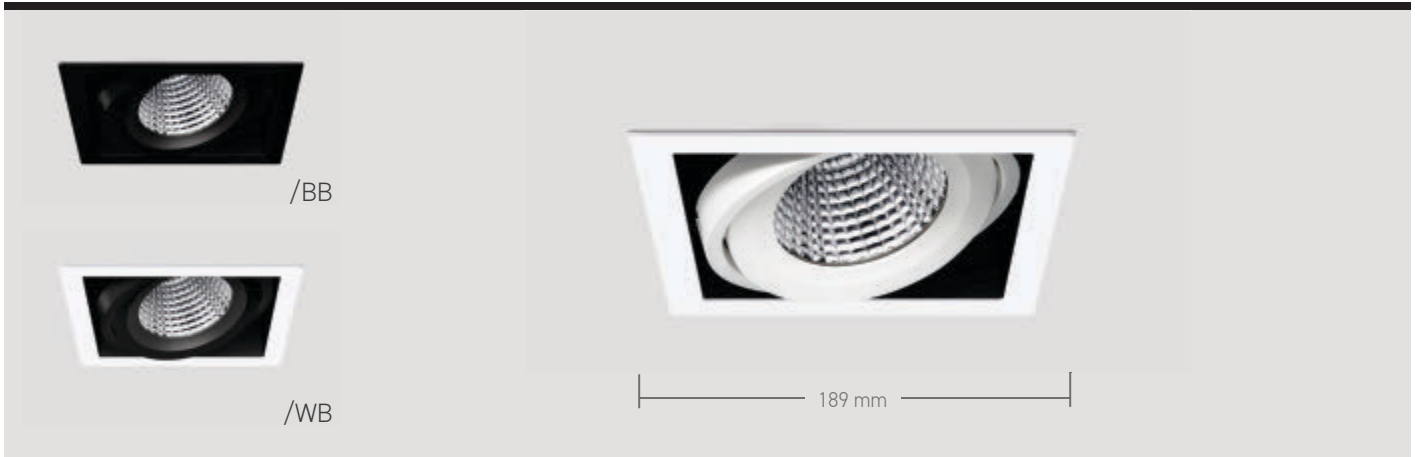


Key Features

- Fully adjustable LED framelight
- Incorporates Tridonic LED module and driver system
- UGR19 and ETL compliant variants
- Multi-faceted 40° reflector as standard. Alternative reflector and beam options
- Emergency, DALI and dimming options
- Plaster-in version
- 5 year warranty



Technical Drawing

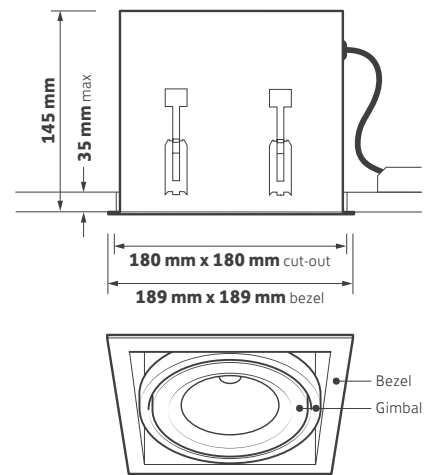

Ordering Information

Luminaire output (lm)	Power (tcW)	Colour	Model Ref.
1025	8	830	ABA001
1075	8	840	ABA002
1725	14	830	ABA003
1800	14	840	ABA004
2375	19	830	ABA005
2450	19	840	ABA006
3150	28	830	ABA007
3275	28	840	ABA008

Options

Please select from the options below.

25° multi-faceted reflector	/MF25
60° multi-faceted reflector	/MF60
40° specular reflector	/SP40
50° satin reflector	/SA50
SwitchDIM, DALI or DSI	/ECO
Excite 100,000 hour driver	/TOP
Casambi Bluetooth wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI emergency (remote indicator)	/EMD
Emergency (integral indicator)	/EMI
DALI emergency (integral indicator)	/EMDI
High colour rendering	/9
Plaster-in	/PI
Mesh void guard	/VG
Black snoot	/SN

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005


White bezel, white gimbal	/WW
Black bezel, black gimbal	/BB
White bezel, black gimbal	/WB
Black bezel, white gimbal	/BW

FAME - ABA TWIN

DATASHEET


TRIDONIC
TECHNOLOGY
INSIDE

GAMMA
ILLUMINATION

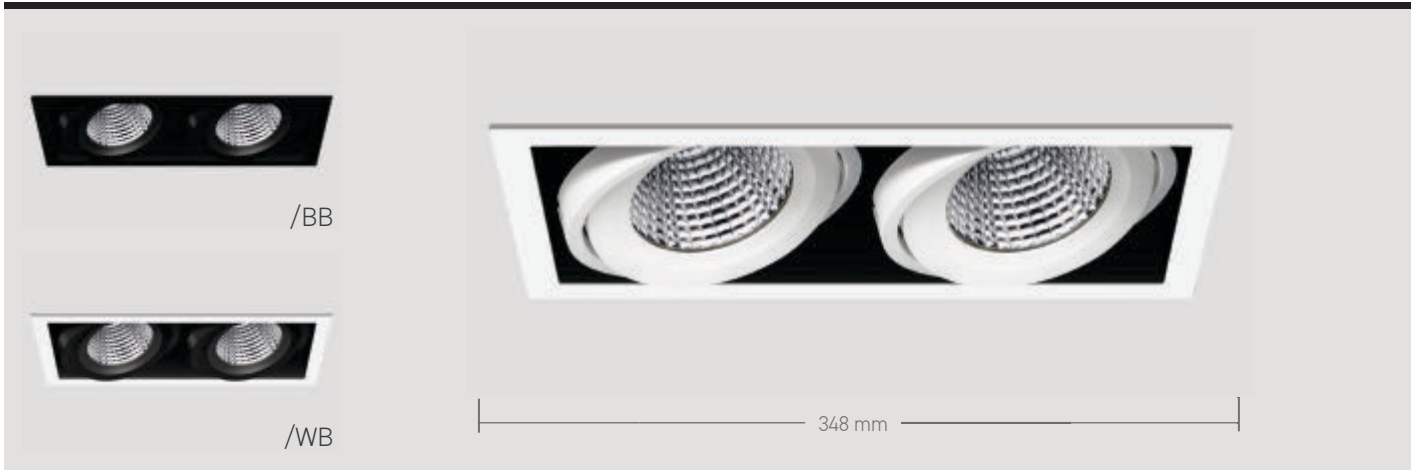

Key Features

- Fully adjustable LED framelight
- Incorporates Tridonic LED module and driver system
- UGR19 and ETL compliant variants
- Multi-faceted 40° reflector as standard. Alternative reflector and beam options
- Emergency, DALI and dimming options
- Plaster-in version
- 5 year warranty



Ordering Information


Heads	Output per head (lm)	Power per head (tcW)	Colour	Model Ref.
2 x	1025	8	830	ABA201
2 x	1075	8	840	ABA202
2 x	1725	14	830	ABA203
2 x	1800	14	840	ABA204
2 x	2375	19	830	ABA205
2 x	2450	19	840	ABA206
2 x	3150	28	830	ABA207
2 x	3275	28	840	ABA208

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

White bezel, white gimbal	/WW
Black bezel, black gimbal	/BB
White bezel, black gimbal	/WB
Black bezel, white gimbal	/BW

Technical Drawing

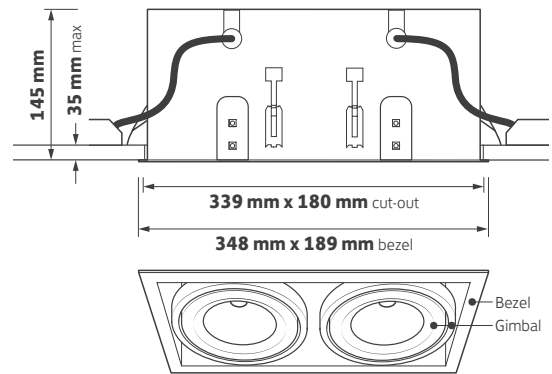

Options

Please select from the options below.


25° multi-faceted reflector	/MF25
60° multi-faceted reflector	/MF60
40° specular reflector	/SP40
50° satin reflector	/SA50
SwitchDIM, DALI or DSI	/ECO
Excite 100,000 hour driver	/TOP
Casambi Bluetooth wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI emergency (remote indicator)	/EMD
Emergency (integral indicator)	/EMI
DALI emergency (integral indicator)	/EMDI
High colour rendering	/9
Plaster-in	/PI
Mesh void guard	/VG
Black snoot	/SN

FAME - ABA TRIPLE

DATASHEET


TRIDONIC
TECHNOLOGY
INSIDE

GAMMA
ILLUMINATION

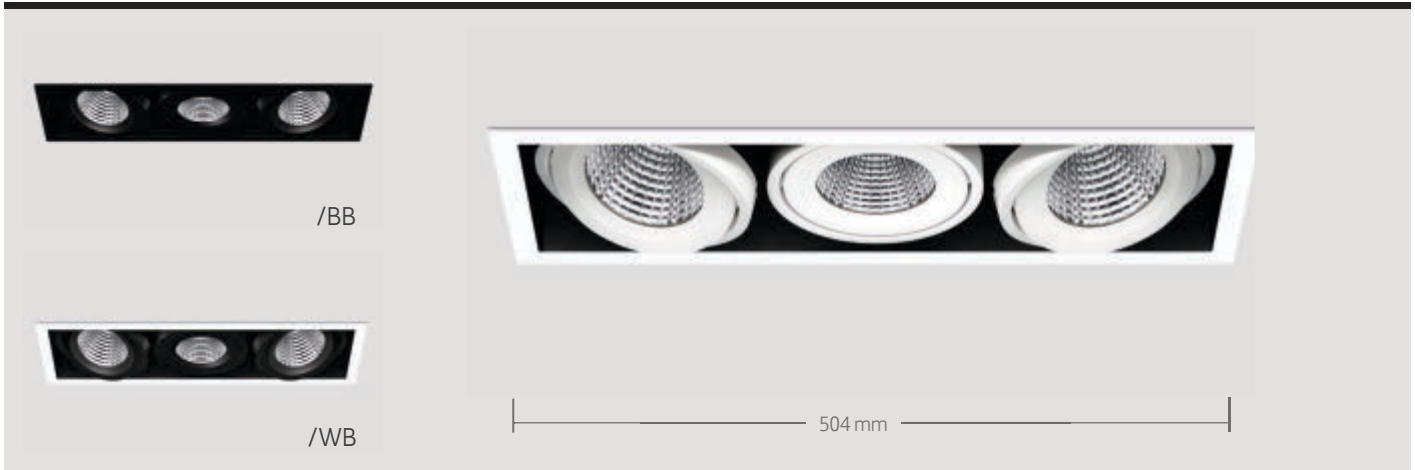


Key Features

- Fully adjustable LED framelight
- Incorporates Tridonic LED module and driver system
- UGR19 and ETL compliant variants
- Multi-faceted 40° reflector as standard. Alternative reflector and beam options
- Emergency, DALI and dimming options
- Plaster-in version
- 5 year warranty



Technical Drawing

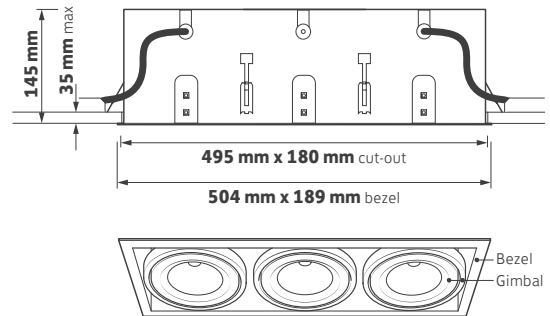

Ordering Information

Heads	Output per head (lm)	Power per head (tcW)	Colour	Model Ref.
3 x	1025	8	830	ABA301
3 x	1075	8	840	ABA302
3 x	1725	14	830	ABA303
3 x	1800	14	840	ABA304
3 x	2375	19	830	ABA305
3 x	2450	19	840	ABA306
3 x	3150	28	830	ABA307
3 x	3275	28	840	ABA308

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

White bezel, white gimbal	/WW
Black bezel, black gimbal	/BB
White bezel, black gimbal	/WB
Black bezel, white gimbal	/BW

Options

Please select from the options below.

25° multi-faceted reflector	/MF25
60° multi-faceted reflector	/MF60
40° specular reflector	/SP40
50° satin reflector	/SA50
SwitchDIM, DALI or DSI	/ECO
Excite 100,000 hour driver	/TOP
Casambi Bluetooth wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI emergency (remote indicator)	/EMD
Emergency (integral indicator)	/EMI
DALI emergency (integral indicator)	/EMDI
High colour rendering	/9
Plaster-in	/PI
Mesh void guard	/VG
Black snoot	/SN

Options



/MF25
25° multi-faceted




/MF60
60° multi-faceted



/SP40
40° Specular



/SA50
50° Satin



/ECO
SwitchDIM, DALI or DSI



/TOP
Tridonic Excite Driver - 100K hours
I-Select, Loop in - loop out



/EM
EM conversion (remote indicator)




/EMD
DALI & self-test EM conversion
(remote indicator)



/EMI
EM conversion (integral indicator)




/EMDI
DALI & self-test EM conversion
(integral indicator)



/VG
Mesh void guard



/SN
Black snoot

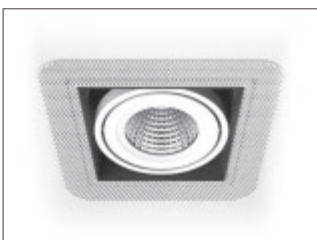

/PI
Plaster-in



/BTC
Casambi Bluetooth wireless
network (inc dim)



/9
Ra90 High colour rendering



Product variations
Other colours and specifications
available on request



/WW
White bezel, white gimbal



/BB
Black bezel, black gimbal



/WB
White bezel, black gimbal



/BW
Black bezel, white gimbal

NB: White - RAL9016 Black - RAL9005

