


FAME - ABB SINGLE

DATASHEET


PHILIPS
TECHNOLOGY
INSIDE

GAMMA
ILLUMINATION

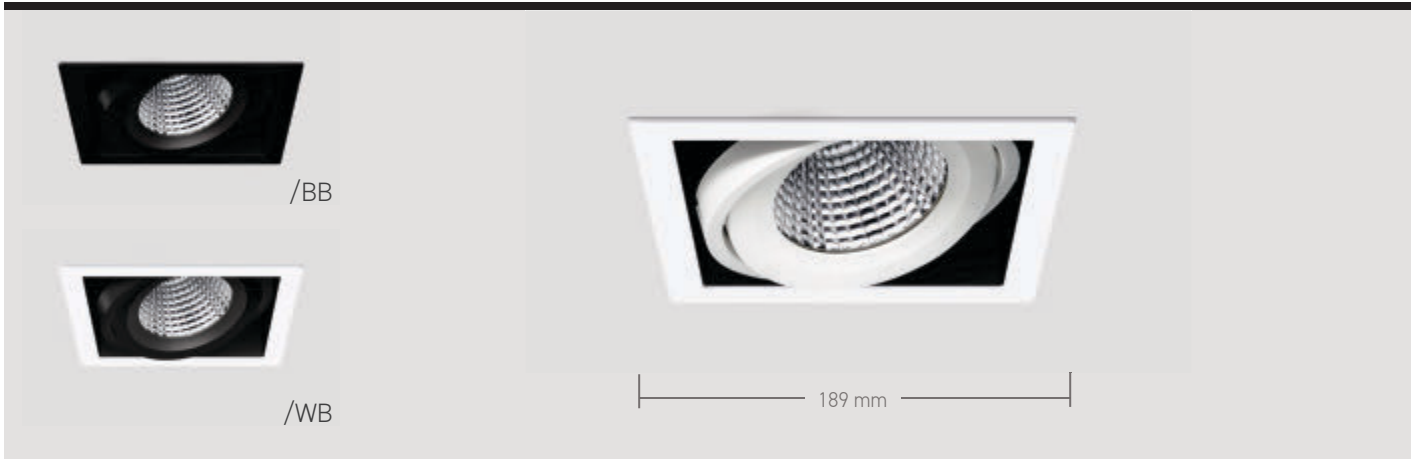


Key Features

- Fully adjustable LED framelight
- Incorporates Philips Premium White LED module and driver system
- UGR19 and ETL compliant variants
- Multi-faceted 40° reflector as standard. Alternative reflector and beam options
- Plaster-in option
- Emergency, DALI and dimming options
- 5 year warranty



Technical Drawing

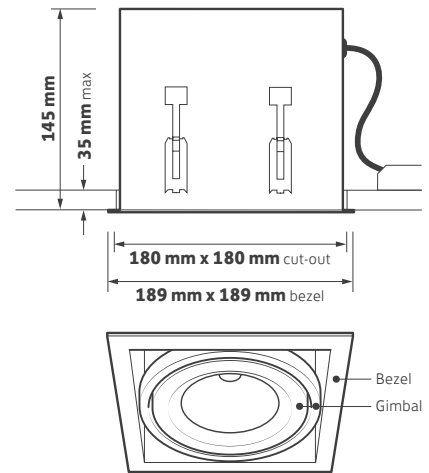

Ordering Information

Luminaire output (lm)	Power (tcW)	Colour	Model Ref.
1800	18	930	ABB001
1925	18	940	ABB002
2425	27	930	ABB003
2600	27	940	ABB004
3250	32	930	ABB005
3500	32	940	ABB006
4600	48	930	ABB007
4950	48	940	ABB008

Options

Please select from the options below.

25° multi-faceted reflector	/MF25
60° multi-faceted reflector	/MF60
40° specular reflector	/SP40
50° satin reflector	/SA50
Touch DIM & DALI	/T+DALI
Casambi Bluetooth wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI emergency (remote indicator)	/EMD
Emergency (integral indicator)	/EMI
DALI emergency (integral indicator)	/EMDI
Plaster-in	/PI
Mesh void guard	/VG
Black snoot	/SN

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

White bezel, white gimbal	/WW
Black bezel, black gimbal	/BB
White bezel, black gimbal	/WB
Black bezel, white gimbal	/BW

FAME - ABB TWIN

DATASHEET


PHILIPS
TECHNOLOGY
INSIDE

GAMMA
ILLUMINATION




Key Features

- Fully adjustable LED framelight
- Incorporates Philips Premium White LED module and driver system
- UGR19 and ETL compliant variants
- Multi-faceted 40° reflector as standard. Alternative reflector and beam options
- Plaster-in option
- Emergency, DALI and dimming options
- 5 year warranty



Technical Drawing

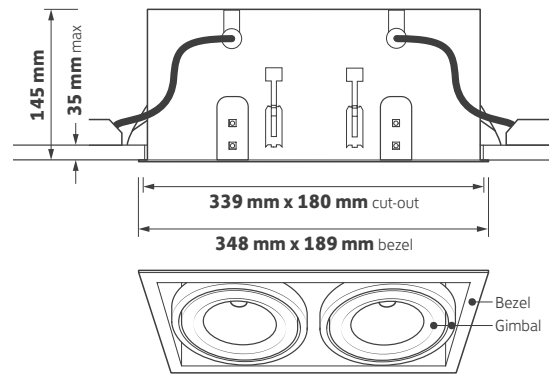

Ordering Information

Heads	Output per head (lm)	Power per head (tcW)	Colour	Model Ref.
2 x	1800	18	930	ABB201
2 x	1925	18	940	ABB202
2 x	2425	27	930	ABB203
2 x	2600	27	940	ABB204
2 x	3250	32	930	ABB205
2 x	3500	32	940	ABB206
2 x	4600	48	930	ABB207
2 x	4950	48	940	ABB208

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

White bezel, white gimbal	/WW
Black bezel, black gimbal	/BB
White bezel, black gimbal	/WB
Black bezel, white gimbal	/BW

Options

Please select from the options below.


25° multi-faceted reflectors	/MF25
60° multi-faceted reflectors	/MF60
40° specular reflectors	/SP40
50° satin reflectors	/SA50
Touch DIM & DALI	/T+DALI
Casambi Bluetooth wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI emergency (remote indicator)	/EMD
Emergency (integral indicator)	/EMI
DALI emergency (integral indicator)	/EMDI
Plaster-in	/PI
Mesh void guard	/VG
Black snouts	/SN

FAME - ABB TRIPLE

DATASHEET


PHILIPS
TECHNOLOGY
INSIDE

GAMMA
ILLUMINATION

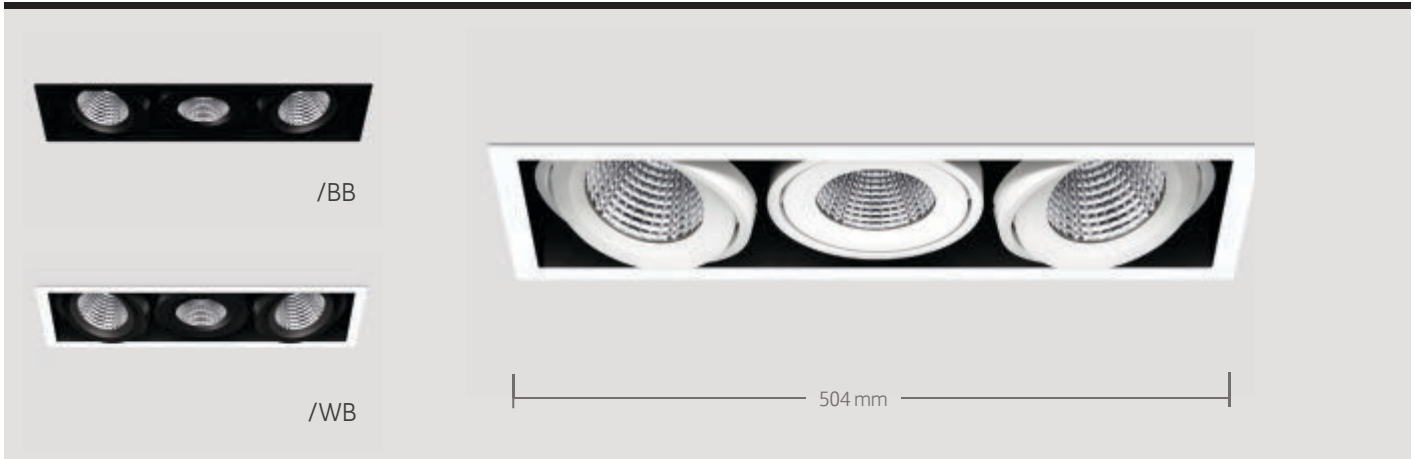


Key Features

- Fully adjustable LED framelight
- Incorporates Philips Premium White LED module and driver system
- UGR19 and ETL compliant variants
- Multi-faceted 40° reflector as standard. Alternative reflector and beam options
- Plaster-in option
- Emergency, DALI and dimming options
- 5 year warranty



Technical Drawing

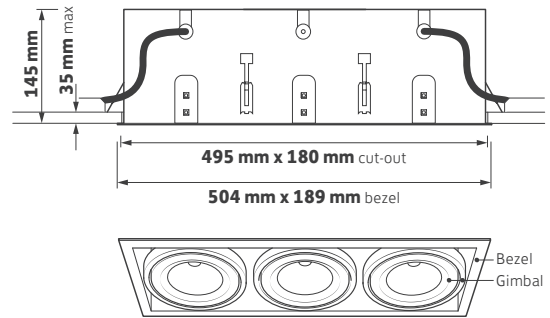

Ordering Information

Heads	Output per head (lm)	Power per head (tcW)	Colour	Model Ref.
3 x	1800	18	930	ABB301
3 x	1925	18	940	ABB302
3 x	2425	27	930	ABB303
3 x	2600	27	940	ABB304
3 x	3250	32	930	ABB305
3 x	3500	32	940	ABB306
3 x	4600	48	930	ABB307
3 x	4950	48	940	ABB308

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

White bezel, white gimbal	/WW
Black bezel, black gimbal	/BB
White bezel, black gimbal	/WB
Black bezel, white gimbal	/BW

Options

Please select from the options below.

25° multi-faceted reflectors	/MF25
60° multi-faceted reflectors	/MF60
40° specular reflectors	/SP40
50° satin reflectors	/SA50
Touch DIM & DALI	/T+DALI
Casambi Bluetooth wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI emergency (remote indicator)	/EMD
Emergency (integral indicator)	/EMI
DALI emergency (integral indicator)	/EMDI
Plaster-in	/PI
Mesh void guard	/VG
Black snouts	/SN

Options



/MF25
25° multi-faceted



/MF60
60° multi-faceted



/SP40
40° Specular



/SA50
50° Satin



/T+DALI
Touch dimming / DALI



/EM
EM conversion (remote indicator)




/EMD
DALI & self-test EM conversion
(remote indicator)



/EMI
EM conversion (integral indicator)




/EMDI
DALI & self-test EM conversion
(integral indicator)



/VG
Mesh void guard



/SN
Black snout

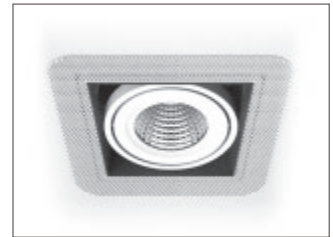

/PI
Plaster-in



/BTC
Casambi Bluetooth wireless
network (inc dim)



Product variations
Other colours and specifications
available on request



/WW
White bezel, white gimbal



/BB
Black bezel, black gimbal



/WB
White bezel, black gimbal



/BW
Black bezel, white gimbal

NB: White - RAL9016 Black - RAL9005

