




Key Features

- Fully adjustable twin LED surface mounted framelight
- Single version available
- Medium beam multi-faceted reflector as standard
- Paired with Tridonic system for outstanding efficacy
- Beam angle and colourway options
- Two gimbal fixing positions for added flexibility
- Excellent luminaire efficacy of up to 112.8 lm/W
- Lumen maintenance L70 / F10 @ >60,000 hours

Technical Drawing

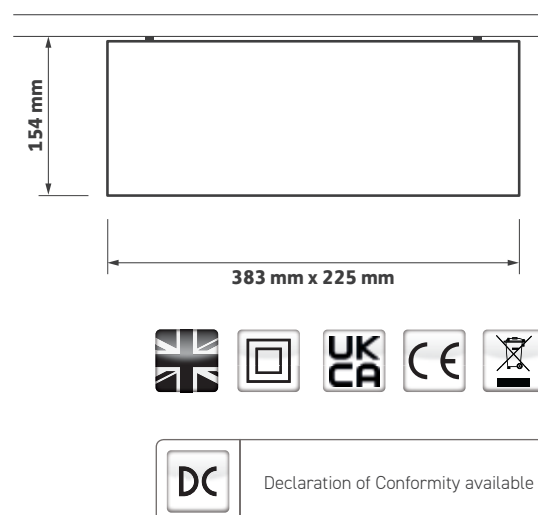

Ordering Information

Luminaire Output (lm)	Power (tcW)	Colour	Model Ref.
2050	20	830	AFA001
2050	18	840	AFA002
4000	38	830	AFA003
4000	36	840	AFA004
6000	61	830	AFA005
6000	59	840	AFA006

Options

Please select from the options below.

Black body and gimbal	/BK
SwitchDIM, DALI or DSI	/ECO
Narrow beam	/NB
Wide beam	/WB
High colour rendering option (Ra 90)	/R9


Options



/NB
25° narrow beam reflector



/WB
60° wide beam reflector



/ECO
SwitchDIM, DALI or DSI



/R9
High colour rendering (R_a 90)



/BK
Black body and gimbal

Also Available



Product variations
Other colours and specifications
available on request



Single available
See Fame AFJ



Recessed available
See Fame ABA and ABB