



Key Features

- Die-cast bezel with UB option for a range of accessories - RAL 9010 white
- Highly specular reflector
- Dimming and emergency conversion options
- Lumen maintenance L70 / B10 @ >60,000 hours
- Available in two system performance levels

System Performance Levels


Performance - a high performance system for professional lighting applications.

Luminaire Output (lm)	Power (tcW)	Colour	Model Ref.
1075	11	830	SS1130
1075	11	840	SS1140
2075	20	830	SS2030
2075	20	840	SS2040
3075	30	830	SS3030
3075	30	840	SS3040
4800	46	830	SS5030
4800	47	840	SS5040

Choice - a professional cost effective driver on board solution for less demanding applications.


Luminaire Output (lm)	Power (tcW)	Colour	Model Ref.
1100	10	840	SS101
1975	18	840	SS102
3025	27	840	SS103

Technical Drawing

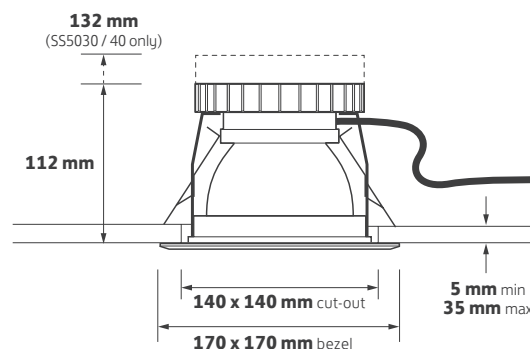

Please select from the options below.

Universal bezel	/UB
Touch dimming / DALI	/T+DALI
Casambi Bluetooth wireless network	/BTC
Emergency - Remote indicator	/EM
DALI / Self-test emergency - Remote indicator	/EMD
Emergency - Integral indicator	/EMI
DALI / Self-test emergency - Integral indicator	/EMDI



Options



/EM
EM conversion with remote*
indicator



/EMD
DALI and self-test EM conversion
with remote indicator*



/EMI
EM conversion with Integral
indicator*



/EMDI
DALI and self-test EM conversion
with Integral indicator*



/UB
Universal bezel option



/BTC
Casambi Bluetooth wireless
network (inc dim)



/T+DALI
Touch dimming / DALI

*Emergency options not available
on Choice range

Accessories


Please specify with Universal Bezel **/UB**



DA001
Clear acrylic



DA002
Opal acrylic

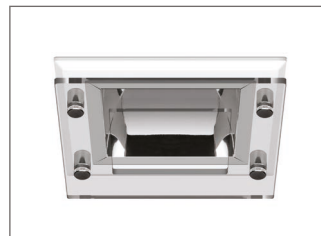

DA003
Clear acrylic halo



DA004
Opal acrylic halo

Also Available



Product variations
Other colours and specifications
available on request



Tridonic modules
See Sysion AAC