
ASPEN - CF DATASHEET




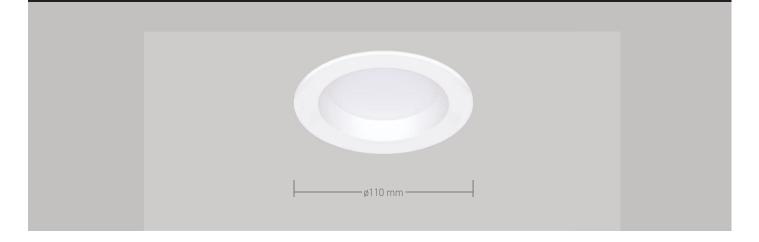

Key Features

- Mini commercial IP54 downlight
- Recessed opal PC diffuser
- SMD LED powered by Tridonic
- Bezel finished in RAL9016
- Switchable 3 x CCT 830, 840, 855
- Lumen maintenance L70 / B50 @ 50,000 hours
- Dimming, DALI and EM options

Technical Drawing



Ordering Information

-				
	Delivered	Absolute	Colour	Model
	Output	Power	Temperature	Reference
	(llm)	(tcW)	К	
	850	9	3000, 4000, 5500	CF001

Options


Please select from the options below.

Mains dimming	/MDIM
SwitchDIM, DALI or DSI	/ECO
Casambi wireless network	/BTC
EM conversion	/EM
DALI and self test EM conversion	/EMD

ASPEN - CF DATASHEET



Options



/MDIM Phase-cut mains dimming



/EMD 3 hour self-test and DALI emergency conversion



/ECO SwitchDIM, DALI or DSI



/BTC Casambi wireless network (inc dim)

/EM 3 hour emergency conversion

Thornhill Road Business Park Tenter Fields, Dewsbury West Yorkshire WF12 9QT +44 (0)1924 482777 www.gamma-uk.com







Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&0E. **GDS-418 27/04/2023**