




Key Features

- 3 hour non-maintained operation
- 254 lumen output
- Compatible with Global Trac, Stucchi and Eutrac systems
- Long life LiFeP04 batteries
- RAL 9016 white. RAL9005 black also available
- DALI / self-test option

Technical Drawing

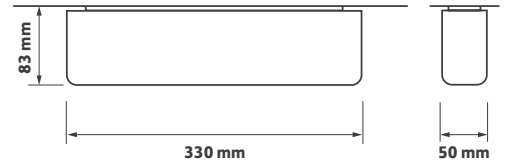

DC Declaration of Conformity available

Ordering Information

Luminaire Output (lm)	Power (tcW)	Model Ref.
254	2.5	EMTRAC

Options

DALI / Self-test (Stucchi adaptor)	/EMD
Black body (RAL9005)	/BK

Options



/EMD
DALI / Self-test (Stucchi adapter)



/BK
Black - RAL 9005

Luminaire Spacing On Emergency Escape Routes

Mounting height (m)	Transverse distance to wall (m)	Transverse to transverse spacing (m)	Transverse to axial spacing (m)	Axial to axial spacing (m)	Axial distance to wall (m)
	1 lux	1 lux	1 lux	1 lux	1 lux
2.5	3.1	7.8	7.9	8.0	3.2
3.0	3.2	8.2	8.4	8.5	3.4
4.0	3.5	9.0	9.2	9.3	3.6
5.0	3.6	9.5	9.7	9.9	3.8
6.0	3.6	10.0	10.2	10.5	3.9

Luminaire Spacing In Open Areas

Mounting height (m)	Transverse distance to wall (m)	Transverse to transverse spacing (m)	Axial to axial spacing (m)	Axial distance to wall (m)
	0.5 lux	0.5 lux	0.5 lux	0.5 lux
2.5	3.3	7.8	8.5	3.3
3.0	3.4	8.7	9.2	3.5
4.0	3.7	10.1	10.4	3.8
5.0	3.9	11.0	11.3	4.0
6.0	4.0	11.7	12.0	4.2