

RIO - ADI

DATASHEET

GAMMA
ILLUMINATION




Key Features

- Compact fire rated IP65 LED downlight
- Complete with white bezel
- Multi-faceted reflector
- Choice of colour temperatures
- Brushed and black bezel options
- Supplied with IP sealing gasket
- Accredited fire rating: FR30, FR60 and FR90*

* Fire Rating in accordance with BS 476:Part 21: 1987, load bearing timber floor with softwood timber joists.

Technical Drawing

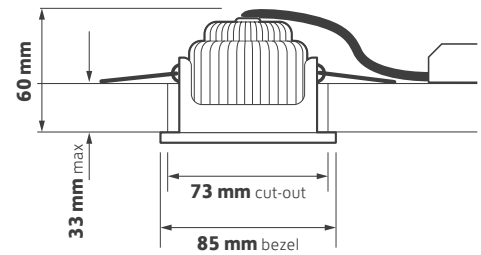

DC

Declaration of Conformity available

Ordering Information

Luminaire Output lm	Power tcW	Colour	Model Ref.
750	8	830	ADI001
775	8	840	ADI002

Options

Please select from the options below.

Brushed bezel	TA149/BA
Black bezel	TA149/BL
Phase-cut mains dimming	/MDIM
SwitchDIM, DALI or DSI	/ECO
3 hour emergency conversion	/EM
3 hour self-test and DALI EM conversion	/EMD
Casambi wireless network (inc dim)	/BTC

RIO - ADI

DATASHEET

GAMMA
ILLUMINATION


Options




TA149/BA
Brushed bezel



TA149/BL
Black bezel



/MDIM
Phase-cut mains dimming



/ECO
SwitchDIM, DALI or DSI



/EM
3 hour emergency conversion*



/EMD
3 hour self-test and DALI
emergency conversion*



/BTC
Casambi wireless network
(inc dim)

*Emergency remote indicators are not IP65 or fire rated

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



FS 593079

