


## KEY FEATURES

- Professional adjustable downlight with a choice of options
- Increased energy efficiency upgrades
- Lumen maintenance now L80/B10 @ >50,000 h
- Suitable for our "LightSaver" remanufacturing service
- Philips LED module and paired driver system
- Multi-faceted 40° pure aluminium reflector as standard
- Premium White Ra90 LED module available
- Emergency, DALI, dimming and wireless network control options
- Finished in white - RAL 9010
- 5 year warranty

## DIMENSIONS

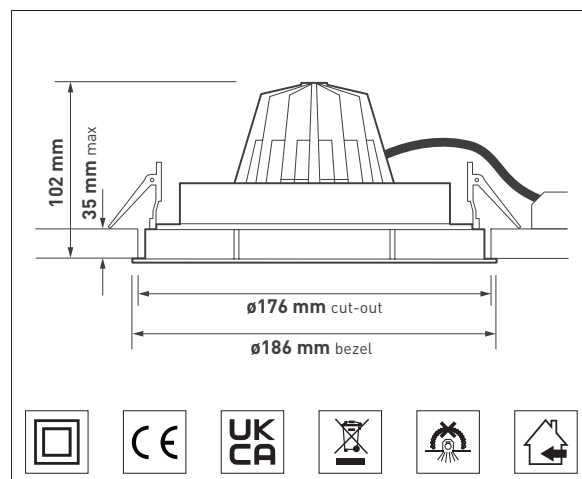

## ORDERING INFORMATION

Luminaire output (lumen)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lumen/tcW)	Model ref.
1000	830	8.0	185	125	<b>GTS001</b>
1050	840	8.0	192	131	<b>GTS002</b>
1750	830	13.5	183	130	<b>GTS003</b>
1825	840	13.5	189	135	<b>GTS004</b>
2425	830	19.0	176	128	<b>GTS005</b>
2525	840	19.0	182	133	<b>GTS006</b>
3250	830	27.0	161	120	<b>GTS007</b>
3375	840	27.0	168	125	<b>GTS008</b>
4375	830	40.0	149	109	<b>GTS009</b>
4550	840	40.0	154	114	<b>GTS010</b>

## OPTIONS

Options	Suffix
Reflector	<b>/MF25, /MF60, /SP40, /SA50</b>
High colour rendering	<b>/R9</b>
Control gear	<b>/T+DALI, /BTC</b>
Emergency - Remote indicator	<b>/EM, /EMD, /EMM</b>
Emergency - Integral indicator	<b>/EMI, /EMDI, /EMMI</b>
Black	<b>/BK</b>
Product variations available	<b>PV.</b>



# NEW GENERATION

## Boston - GTS

### Options and accessories



Membership No 1835



**/MF25**

25° multi-faceted reflector



**/MF60**

60° multi-faceted reflector



**/SP40**

40° specular reflector



**/SA50**

50° satin etched reflector



**/R9**

High colour rendering LED module



**Touch Dimming**

OR

**DALI 2**

**/T+DALI**

Touch dimming or DALI control gear



**CASAMBI**

**/BTC**

Casambi wireless network including dimming



**/EM**

Emergency Remote indicator



**DALI SELF TEST**

**/EMD**

DALI / Self test EM Remote indicator



**LiteMesh SELF TEST**

**/EMM**

Wireless mesh emergency Remote indicator



**/EMI**

Emergency Integral indicator



**DALI SELF TEST**

**/EMDI**

DALI / Self test EM Integral indicator



**LiteMesh SELF TEST**

**/EMMI**

Wireless mesh emergency Integral indicator



**/BK**

Black RAL 9006



**TA210/BLACK**

Black snoot



**TA241**

Centre etched glass



# NEW GENERATION Boston - GTS

## Options and accessories



Membership No 1835


### PV - PRODUCT VARIATIONS



**PV - Contact Sales**  
Any RAL colour bezel



**PV - Contact Sales**  
Choice of connectors



**PV - Contact Sales**  
LSOH / LSF cable



**PV - Contact Sales**  
Choice of modules

### RELATED PRODUCTS



**See TTS / TTT**  
Downlight



**See ABA / ABB**  
Framelight



**See LTS / LTT**  
Track spot



**See AHA**  
Surface downlight



**See AHA**  
Suspended downlight

Thornhill Road Business Park  
Tenter Fields, Dewsbury  
West Yorkshire  
WF12 9QT  
+44 (0)1924 482777  
www.gamma-uk.com



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.