


PROFLUX - AFC

DATASHEET

TRIDONIC
TECHNOLOGY
INSIDE



GAMMA
ILLUMINATION

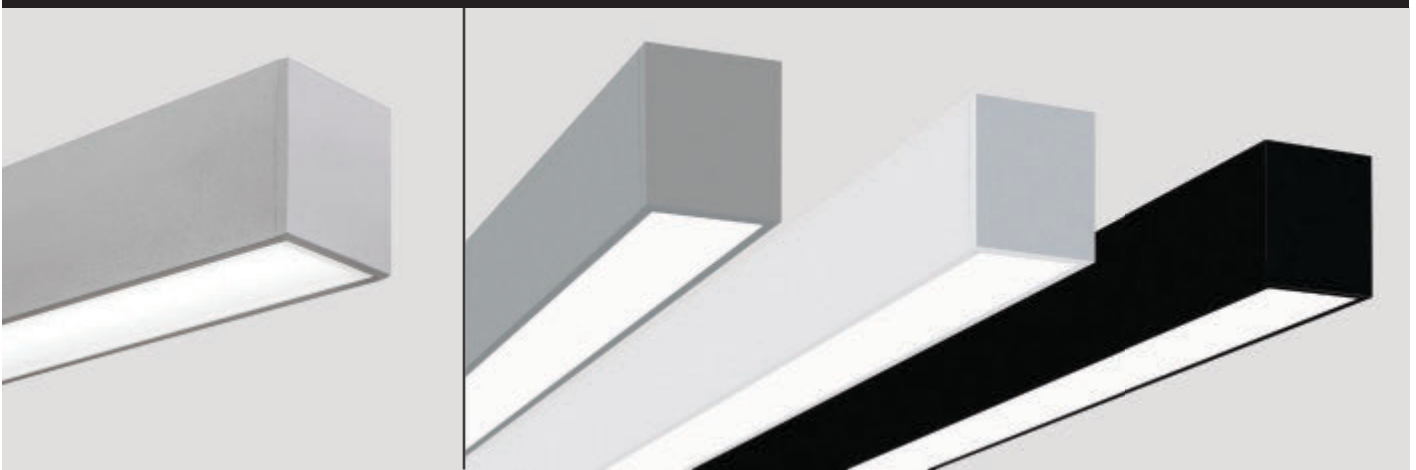

Key Features

- Direct, extruded linear profile luminaire
- Suitable for surface mount or suspension fixing
- Finished in RAL 9006 grey as standard
- Available in 4 standard lengths
- Delivering approx. 2200 llm/m as standard
- Coloured matched, injection moulded end caps
- TPa opal lens for feature, general and visual areas
- Low glare prismatic lens available to aid LG7 compliance
- Tridonic low energy LED and driver system
- Lumen maintenance L80/F10 @ >72,000
- Efficacy up to 127 llm/tcW
- Manufactured in the U.K.

Technical Drawing



Ordering Information

Length	Colour	Luminaire	Model Ref.	Luminaire	Luminaire
		Output (llm)		Output (llm)	Output (llm)
		Std		/LO	/HO
850 mm	830	1725	AFC001	1175	2725
850 mm	840	1825	AFC002	1225	2875
1.2 m	830	2575	AFC003	1750	4100
1.2 m	840	2725	AFC004	1850	4300
1.5 m	830	3150	AFC005	2150	5000
1.5 m	840	3325	AFC006	2250	5250
2.5 m	830	5150	AFC007	3500	8175
2.5 m	840	5425	AFC008	3675	8575

Options

Please select from the options below.

White body	/WH
Black body	/BK
Lower output	/LO
Higher output	/HO
Low glare prismatic lens for LG7 compliance	/LG
SwitchDIM, DALI or DSI	/ECO
EM conversion (not AFC001 / AFC002)	/EMI
Suspension kit	/SUS
Butt joint	/BU


Options




/WH
White body




/BK
Black body



/LO
Lower output




/HO
Higher output



/ECO
SwitchDIM, DALI or DSI




/EMI
EM conversion



/LG
Low glare prismatic lens

Accessories



SUS.163/2/2M
2 m 2 pcs suspension kit
(not 2.5 m)




SUS.163/3/2M
2 m 3 pcs suspension kit
(for 2.5 m)




BU.163/180
180° Butt joint bracket



BU.163/90
90° Butt joint bracket



Product variations
Custom colours



Product variations
Custom colours



PT001
Diffuser removal tool