# STUCCHI<sup>®</sup> ONETRACK<sup>®</sup> DATASHEET






### Key Features

- Surface mounted lighting track system
- Based on the Eurostandard Plus<sup>®</sup> platform
- Suitable for use with Global Trac<sup>®</sup> adaptors
- Three circuit and DALI compatible
- An easy to create and design modular system
- Available in black or white





## Ordering Information

Description		Model Ref White	Model Ref Black
1 m track		9000A-1/W-ST	9000A-1/B-ST
2 m track		9000A-2/W-ST	9000A-2/B-ST
End feed	<b></b>	9001/W	9001/B
Straight connector		9003/W	9003/B
End cap		9004/W	9004/B
L-connector / feed	-	9011/W	9011/B
Flexible adjustable corner connector		9018/W	9018/B
2 m wire suspension kit		S-9000/114-T/W	S-9000/114-T/B
Pattress	$\ominus$	9000/BP-D-W	9000/BP-D-B

### Options

Please select from the options below.



S-9000/T

For a wider range of track and accessories, please contact our sales team.




Please note: specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. GDS-349-REV1 28/11/2022 1 of 2

# STUCCHI® ONETRACK®


DATASHEET




#### Maximum Load

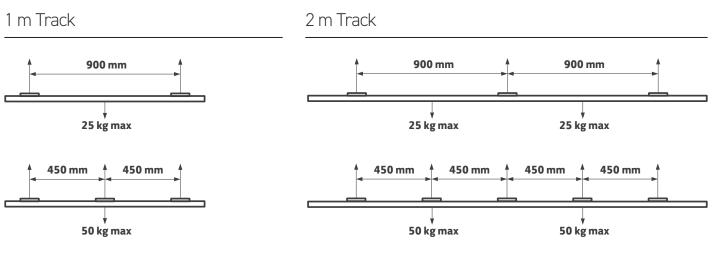

### Layout Example

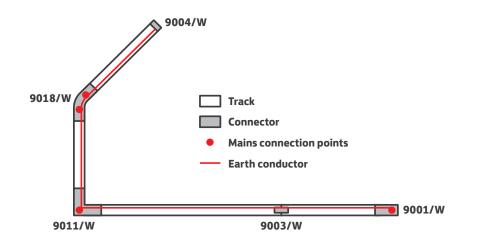

### **Electrical Connections**

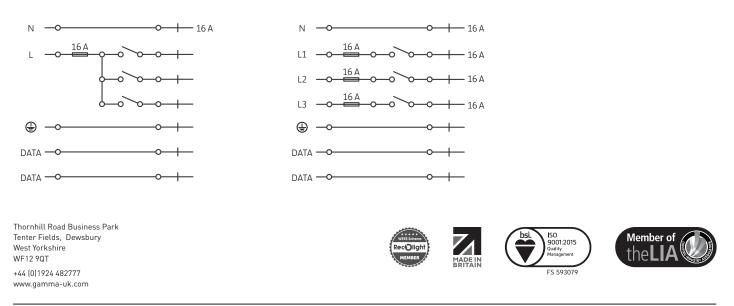

Please note: specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. GDS-349-REV1 28/11/2022 2 of 2