


KEY FEATURES

- Professional, high performance LED downlight
- Available with a wide range of options and accessories
- Tridonic SLE LED module and driver system
- Minimalist die-cast bezel in brilliant white RAL 9016
- Low glare multi-faceted 55° aluminium reflector
- Up to 139 luminaire lumens per total circuit Watt
- Nominal rated life 55,000h L90
- CIBSE TM66 Assessment: "Excellent circularity"
- MacAdam colour tolerance <3 SDCM
- 5 year warranty

DIMENSIONS

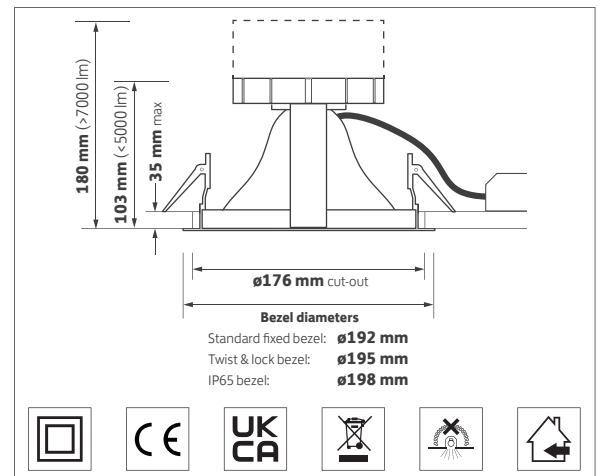

ORDERING INFORMATION

Luminaire output (llm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (llm/tcW)	Model ref.
1200	830	9.0	197	133	AA001
1250	840	9.0	207	139	AA002
1875	830	14.5	196	129	AA003
1975	840	14.5	204	136	AA004
3200	830	24.5	185	131	AA005
3325	840	24.5	194	136	AA006
4625	830	37.0	172	125	AA007
4825	840	37.0	180	130	AA008
7900	830	65.5	166	111	AA009 (/TL or /65)
8250	840	65.5	173	116	AA010 (/TL or /65)
10,025*	830	94.5	144	98	AA011 (/TL or /65)
10,300*	840	94.5	148	101	AA012 (/TL or /65)

* Bridgelux LED module

OPTIONS

Options	Suffix
Satin etched reflector	/SA65
High colour rendering LED	/R9
IP54 sealed clear lens	/54
Control gear	/T+DALI, /TOP, /BTC
Emergency - Remote indicator	/EM, /EMD, /EMM
Emergency - Integral indicator	/EMI, /EMDI, /EMMI
Twist & lock bezel option	/TL
IP65 bezel option	/65
Product variations available	PV.



/SA65

65° satin etched reflector




/R9

High colour rendering LED module




/54

IP54 sealed clear lens**



/ECO

SwitchDIM, DALI & DSI



/TOP

Tridonic Excite Series driver **



/BTC

Casambi wireless network inc. dimming **



/EM

Emergency Remote indicator




/EMD

DALI / Self test EM Remote indicator




/EMM

Wireless mesh EM Remote indicator



/EMI

Emergency Integral indicator



/EMDI


DALI / Self test EM Integral indicator



/EMMI

Wireless mesh EM Integral indicator

** Not available with 009 - 012

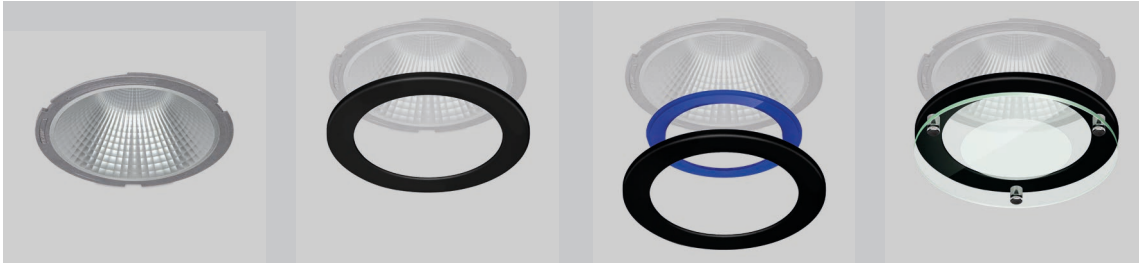

/TL
Twist & lock bezel
option

Bezel

Bezel + accessory

Dropped glass bezel



TA300/WH
White bezel
RAL 9010



TA300/BWH
Brilliant white bezel
RAL 9016



TA300/BL
Black bezel
RAL 9005



TA300/GY
Grey bezel
RAL 9006



TA310/FROST
Frosted snoot




TA310/BLUE
Blue snoot



TA310/BLACK
Black snoot



TA384
Frost hi-light



TA385
Blue hi-light



TA340
IP54 sealed
clear glass



TA341
IP54 sealed
centre etched glass



TA342
IP54 sealed
fully etched glass



TA343
IP54 sealed
clear polycarbonate**



TA344
IP54 sealed
opal polycarbonate**



TA317
IP44 sealed
prismatic lens**



TA301
Dropped glass bezel
c/w outer etched glass



TA302
Dropped glass bezel
c/w clear glass



TA303
Dropped glass bezel
c/w centre etched glass



TA305
Dropped glass bezel
c/w clear halo glass



TA306
Dropped glass bezel
c/w etched halo glass




TA307
Dropped glass bezel
c/w etched glass

** Not available with 009 - 012



/65
IP65 option



Bezel + lens



IP65/002/195
White IP65 bezel
Clear glass




IP65/008/195
White IP65 bezel
Opal polycarbonate**



IP65/009/195
White IP65 bezel
Clear polycarbonate**

PV - PRODUCT VARIATIONS




PV - Contact Sales
Any RAL colour
twist & lock / IP65 bezel




PV - Contact Sales
Choice of connectors



PV - Contact Sales
LSOH / LSF cable



PV - Contact Sales
Choice of modules



PV - Contact Sales
High ambient
temperatures


RELATED PRODUCTS



See Great White
130mm downlights



See Titan
240mm downlights



See Aspen
IP54 downlights



See Sysion SRE
Surface / suspended
downlights



GF008 / GF010
Anti-tamper driver
Anti-tamper bit

** Not available with 009 - 012