

INSTALLATION GUIDE:

LED DOWNLIGHT
990.0190.01



IMPORTANT:


The luminaire must not be covered by any debris or insulating material. Ensure there is a minimum of 50 mm airspace around the luminaire. Electrical termination must be carried out by a qualified electrician in accordance with the latest edition of IEE wiring regulations BS7671.

NOTE: THE LED MODULES IN THIS LUMINAIRE ARE NON-USER REPLACEABLE.
PLEASE RETAIN THIS GUIDE FOR FUTURE REFERENCE AND RECYCLE PACKAGING.

A




ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION




- Cut a 140 x 140 mm square hole at the desired location.

B




- Remove reflector from luminaire taking care not to damage the reflector surface.

C

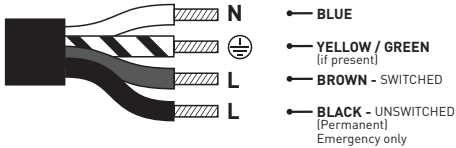


- Connect the luminaire to the mains supply using a terminal block (not supplied) compliant with the requirements of EN60998-2-1 or 2-2.
- For Touch & Dim / DALI wiring see instruction leaflet **990.0009.01**.

D




- Offer luminaire into desired location.

E

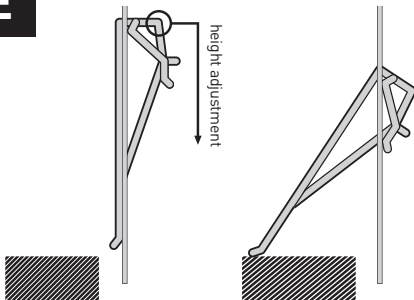

- Lock the luminaire in place by means of the four adjustable fixing springs as illustrated above.

F

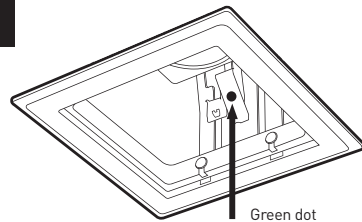

- Align green dot on the reflector with the green dot on the luminaire and carefully relocate reflector.
- Where the luminaire is supplied with an accessory, install according to separate instructions provided.



REINSTATE MAINS SUPPLY