




KEY FEATURES

- Contemporary IK10 / IP65 rated LED bulkhead
- High transmission, low spotting TP(a) rated opal diffuser
- Twist & lock bezel to conceal fixings
- UL94 polycarbonate body with back-lit halo effect option
- Tridonic LED and driver system inside
- 3 step MacAdam (SDCM)
- Long life up to 72,000h L80
- DALI, wireless control and emergency options
- Integral microwave presence detector options
- 5 year warranty

DIMENSIONS

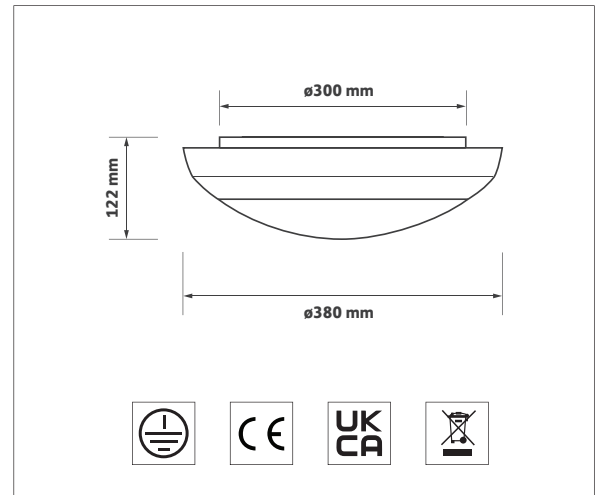

ORDERING INFORMATION

Luminaire output (lm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
1200	830	10	181	120	AFG001
1250	840	10	191	125	AFG002
1600	830	14	172	114	AFG003
1700	840	14	182	121	AFG004
2225	830	21	164	106	AFG005
2350	840	21	172	112	AFG006

OPTIONS

Options	Suffix
Black bezel	/BL
Back-lit halo effect	/HALO
Anti-tamper diffuser fixing screws	/AT
Control gear *	/ECO, /SO, /SD, /BTC
Emergency - Integral indicator	/EMI, /EMDI
Product variations available	PV.

* /SD and /SO not available with /ECO




/BL
Black bezel




/HALO
Back-lit halo effect




/AT
Anti-tamper diffuser screws




/ECO
SwitchDIM / DALI / DSI



/SO
Integral motion sensor
On / off
(not available with /ECO)



/SD
Integral motion sensor
On / 10% dim
(not available with /ECO)



/BTC
Casambi wireless network
inc. dimming



/EMI
Emergency
Integral indicator



/EMDI
DALI emergency
Integral indicator

PV - PRODUCT VARIATIONS



PV - Contact Sales
Grey trim



PV - Contact Sales
Antimicrobial enclosure -
Lifetime protection against
99.9% of bacteria



PV - Contact Sales
Tridonic EM-Pro and
self-test emergency



India - AFG

Options and accessories



Membership No 1835

RELATED PRODUCTS



See Duro ABI
IP65 batten



See Rio ADI
85 mm IP65 / FR90 downlight



See Great White
130 mm IP65 downlights



See Sysion
195 mm IP65 downlights



See Titan
237 mm IP65 downlights



See Quinto AFE
IP65 linear downlight

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.