


KEY FEATURES

- Decorative LED wall light
- Bi-directional light output
- Opal acrylic diffusers for homogenous illumination
- Mount vertically or horizontally
- Integral LED driver
- Life >72,000 hours L80/B10
- DALI, wireless control and emergency options
- White RAL 9016 as standard.
- Black RAL 9005 and grey RAL 9006 options
- Short circuit, overload and temperature protection
- 5 year warranty

DIMENSIONS

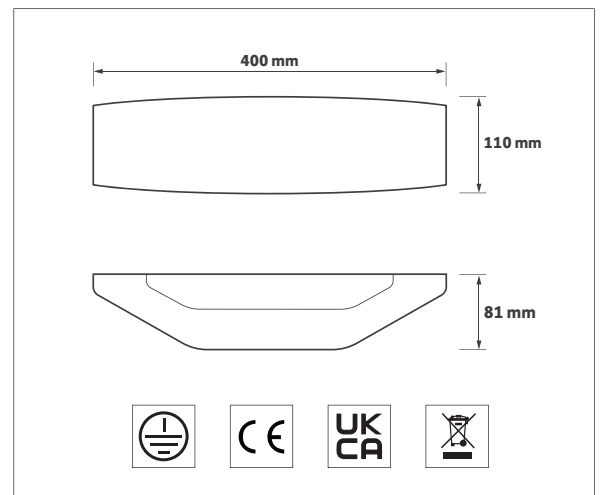

ORDERING INFORMATION

Luminaire output (lm)	Colour temp	Luminaire power (tcW)	Luminaire efficacy (lm/tcW)	Model ref.
825	830	9	92	AEC001
875	840	9	97	AEC002
1550	830	16	97	AEC003
1625	840	16	102	AEC004
2200	830	24	92	AEC005
2325	840	24	97	AEC006

OPTIONS

Options	Suffix
Finish options	/BK, /GY
Control gear	/ECO, /BTC
Emergency - Integral indicator	/EMI, /EMDI



Viro - AEC

Options and accessories



Membership No 1835




/BK

Black - RAL 9005



/GY

Grey - RAL 9006




/ECO

SwitchDIM / DALI / DSI




/BTC

Casambi wireless network
inc. dimming



/EMI

Emergency
Integral indicator



/EMDI


DALI emergency
Integral indicator

PV - PRODUCT VARIATIONS



PV - Contact Sales

Any RAL colour

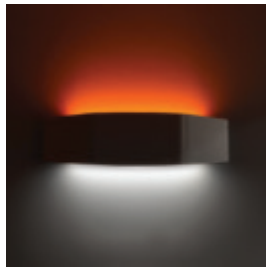

PV - Contact Sales

Coloured diffusers

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C.
Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.