


KEY FEATURES

- Professional low glare downlight with wide choice of options
- Suitable for future reworking in our Renew and Reuse workshop
- Tridonic LED module and paired driver system
- ETL compliant variants available - Contact Sales
- Lumen maintenance L80/F10 @ >55,000 h
- Multi-faceted 40° pure aluminium reflector as standard
- Height under 100 mm using optimised thermodynamics
- Emergency, DALI, dimming and wireless network control options
- Decorative and IP65 sealed bezel options
- 5 year warranty

DIMENSIONS

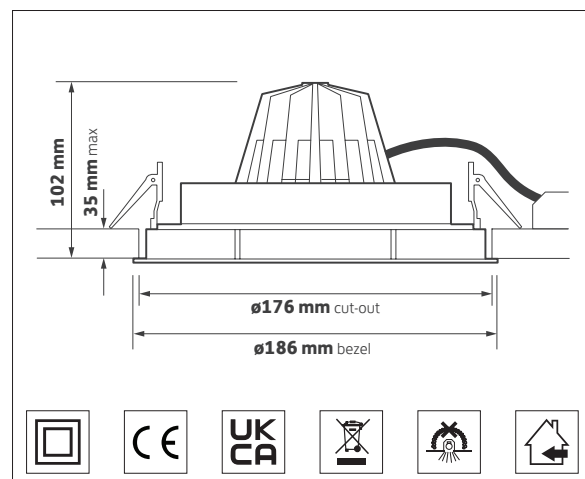

ORDERING INFORMATION

Luminaire output (lm)	Colour	Luminaire power (tcW)	Luminaire efficacy (lm/tcW)	Model ref.
1025	830	8	126.9	GTT001
1075	840	8	131.3	GTT002
1725	830	14	124.9	GTT003
1800	840	14	129.4	GTT004
2375	830	19	123.1	GTT005
2450	840	19	127.2	GTT006
3150	830	28	113.1	GTT007
3275	840	28	116.9	GTT008

OPTIONS

Options	Suffix
Reflectors	/MF25, /MF60, /SP40, /SA50
Control gear	/ECO, /TOP, /BTC
Emergency - Remote indicator	/EM, /EMD, /EMS
Emergency - Integral indicator	/EMI, /EMDI, /EMSI
Product variations available	PV.



/MF25

25° multi-faceted reflector




/MF60

60° multi-faceted reflector




/SP40

40° specular reflector




/SA50

50° satin etched reflector



/ECO

SwitchDIM, DALI & DSI



/TOP

Tridonic Excite Series driver




/BTC

Casambi wireless control driver



BTWS001

Wireless Casambi single wall switch



BTWS002

Wireless Casambi twin wall switch



/EM

Emergency Remote indicator




/EMD

DALI emergency Remote indicator



/EMS

Self test emergency Remote indicator



/EMI

Emergency Integral indicator




/EMDI

DALI emergency Integral indicator




/EMSI

Self test emergency Integral indicator



/BK

Black RAL 9006



TA210/BLACK

Black snoot



TA241

Centre etched glass




Boston - GTT

Options and accessories




Membership No 1835

PV - PRODUCT VARIATIONS



PV - Contact Sales
Any RAL colour bezel



PV - Contact Sales
Plug & Play
Choice of connectors




PV - Contact Sales
LSOH / LSF cable



PV - Contact Sales
Choice of modules




PV - Contact Sales
RGBW colour change

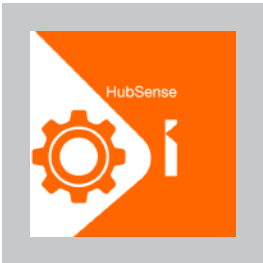


PV - Contact Sales
HubSense wireless

RELATED PRODUCTS



See TTS / TTT
Downlight




See ABA / ABB
Framelight



See LTS / LTT
Track spot



See AHA
Surface downlight



See AHA
Suspended downlight

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.