


KEY FEATURES

- Professional, high performance LED downlight
- Minimalist die-cast bezel in white RAL 9010
- UB bezel option to accept a range of accessories
- Philips DLM LED module and driver system
- 75° highly specular reflector with an outstanding efficiency of 96%
- Nominal rated life >60,000 hrs @ L70/B10

DIMENSIONS

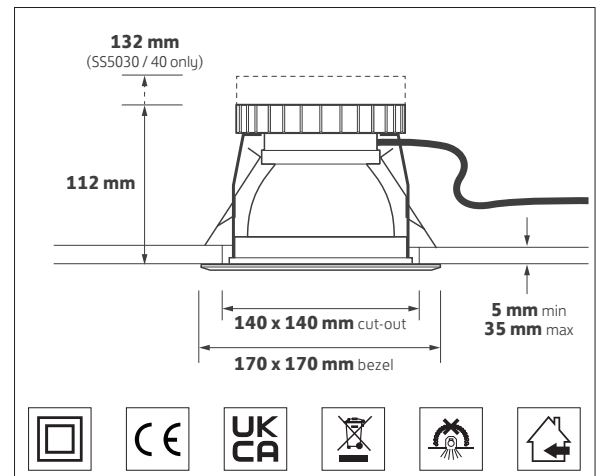


ORDERING INFORMATION

Luminaire output (lm)	Colour	Luminaire power (tcW)	Luminaire efficacy (lm/tcW)	Model ref.
1075	830	9.5	113	SS1130
1150	840	9.5	121	SS1140
1850	830	17.5	106	SS2030
2025	840	17.5	116	SS2040
2850	830	30.0	95	SS3030
3075	840	30.0	103	SS3040
4425	830	46.5	96	SS5030
4800	840	46.5	104	SS5040

OPTIONS

Options	Suffix
Universal bezel	/UB
Control gear	/T+DALI, /BTC
Emergency - Remote indicator	/EM, /EMD, /EMS
Emergency - Integral indicator	/EMI, /EMDI, /EMSI
Product variations available	PV.



/T+DALI

Touch dimming or DALI control gear



/BTC

Casambi wireless network inc. dimming



/EM

Emergency Remote indicator



/EMD

DALI emergency Remote indicator



/EMS

Self test emergency Remote indicator



/EMI

Emergency Integral indicator



/EMDI

DALI emergency Integral indicator



/EMSI

Self test emergency Integral indicator



/UB

Universal bezel to accept decorative accessories



DA001

Clear acrylic



DA002

Opal acrylic



DA003

Clear acrylic square halo



DA004

Opal acrylic square halo



Sysion - SS Options



Membership No 1835

PV - PRODUCT VARIATIONS



PV - Contact Sales
Any RAL colour bezel




PV - Contact Sales
Black reflector



PV - Contact Sales
Choice of connectors



PV - Contact Sales
LSOH / LSF cable




PV - Contact Sales
High ambient temperatures

RELATED PRODUCTS



See Sysion AAC
Tridonic



See Sysion AAC
Tunable white

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.