Nocto - AB
Data Sheet

KEY FEATURES

- Ultra low-glare, high performance LED linear
- Premium matt black dark-light baffles as standard
- Features 50° office LED lens as standard
- Tridonic LED and driver system inside
- RAL 9006 grey as standard with black or white options
- Surface mounted as standard with suspension option
- Available in 1.2m and 1.5m lengths
- Lumen maintenance L80/F10 @ >75,000 hours
- Proudly made in the UK

DIMENSIONS

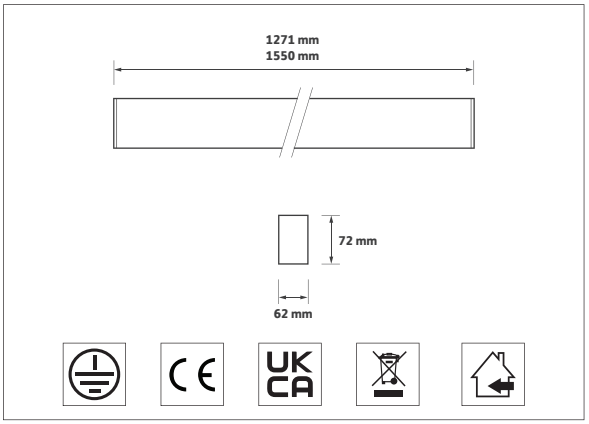

ORDERING INFORMATION

Length (m)	Colour temp	Luminaire output (llm)	Luminaire power (tcW)	UGR	Luminaire efficacy (llm/tcW)	Model ref.
1.2	830	1850	14	12	132	**AB001/LO**
1.2	830	2725	20	13	136	**AB001**
1.2	830	3575	27	14	132	**AB001/HO**
1.2	840	1925	14	12	138	**AB002/LO**
1.2	840	2850	20	13	143	**AB002**
1.2	840	3750	27	14	139	**AB002/HO**
1.5	830	2300	17	12	135	**AB003/LO**
1.5	830	3425	25	13	137	**AB003**
1.5	830	4475	33	14	136	**AB003/HO**
1.5	840	2400	17	12	141	**AB004/LO**
1.5	840	3575	25	13	143	**AB004**
1.5	840	4675	33	14	142	**AB004/HO**

OPTIONS

Options	Suffix
Low or high output	**/LO, /HO**
Body finish	**/WH, /BK**
White softlight baffles	**/WSB**
Wide beam lens 80°	**/WB**
Control gear	**/ECO, /BTC**
Emergency - Integral indicator	**/EMI, /EMSI, /EMDI**
Suspension kit	**SUS.163/2/2M**
Baffle removal tool	**PT001**
Track mounted	**/TK**
Product variations available	**PV.**

Nocto - AB
Options and accessories

/WH
White body
RAL 9016

/BK
Black body
RAL 9005

/WSB
White soft-light baffles



/WB
Wide beam 80° lenses



/ECO
SwitchDIM, DALI or DSI
control gear

/BTC
Bluetooth control
inc. dimming

/EMI
Emergency
Integral indicator

/EMSI
Self-test emergency
Integral indicator

/EMDI
DALI emergency
Integral indicator

BU.163/90
Direct butt-up kit 90°

BU.163/180
Direct butt-up kit 180°

SUS.163/2/2M
Suspension kit

/TK
Track mounted

PT001
Baffle removal tool

PV - PRODUCT VARIATIONS



PV - Contact Sales
Multiple baffle segments

PV - Contact Sales
Direct / Indirect

PV - Contact Sales
High colour rendering

PV - Contact Sales
Asymmetric wall wash baffles

PV - Contact Sales
Gloss black baffles

PV - Contact Sales
Chrome effect baffles

PV - Contact Sales
Matt silver baffles

PV - Contact Sales
Tunable white



PV - Contact Sales
Choice of integral sensors

PV - Contact Sales
Higher output

PV - Contact Sales
Round baffles

PV - Contact Sales
Any RAL colour baffles



PV - Contact Sales
Medium beam lenses 35°



PV - Contact Sales
Oval lenses 25-70°



PV - Contact Sales
Batwing lenses 80°

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com

ICEL
RecOlight MEMBER
MADE IN BRITAIN Membership 1835
bsi ISO 9001 Quality Management Systems CERTIFIED FS 593079
LIAQA ASSURED COMPANY

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C.
Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.