


KEY FEATURES

- Professional, high performance LED downlight
- Features Tridonic SLE LED module and driver system
- Slimline die-cast bezel in brilliant white RAL 9016
- Low glare multi-faceted aluminium reflector
- High efficacies of over 130 llm/tcW
- Nominal rated life 60,000h L90/B10
- MacAdam colour tolerance <3 SDCM
- DALI, Bluetooth and emergency options
- IP54 and IP65 options
- 5 year warranty
- Proudly made in UK

DIMENSIONS

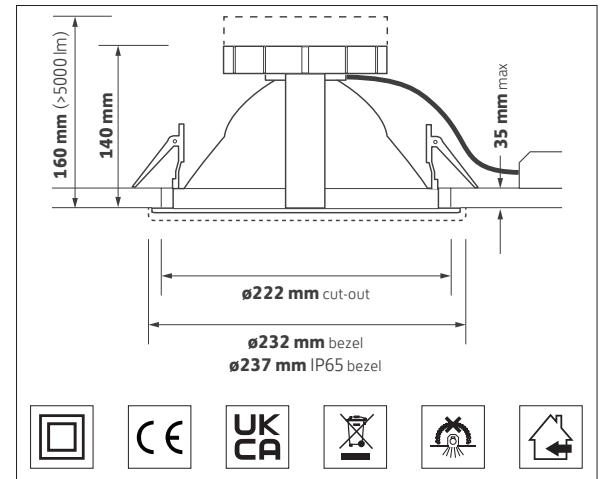


ORDERING INFORMATION

Luminaire output (llm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (llm/tcW)	Model ref.
1150	830	9.5	197	121	AG001
1200	840	9.5	207	126	AG002
1825	830	14.5	196	126	AG003
1900	840	14.5	204	131	AG004
3100	830	24.5	185	127	AG005
3250	840	24.5	194	133	AG006
4500	830	37.0	172	122	AG007
4700	840	37.0	180	127	AG008
5100	830	44.5	170	115	AG009
5300	840	44.5	177	119	AG010


OPTIONS

Options	Suffix
Control gear	/ECO, /TOP, /BTC
High colour rendering	/R9
60° satin etch reflector	/SA60
Emergency - Remote indicator	/EM, /EMP
Emergency - Integral indicator	/EMI, /EMPI
IP54 sealed clear lens	/54
IP65 universal carrier bezel	/65
Product variations available	PV.



/ECO

SwitchDIM, DALI & DSI



/TOP

Tridonic Excite Series driver



/BTC

Casambi wireless network inc. dimming




/R9

High colour rendering LED module




/SA60

60° satin etch reflector




/EM

Emergency Remote indicator



/EMP

EM Pro DALI emergency Remote indicator

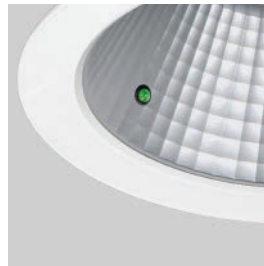

/EMI

Emergency Integral indicator



/EMPI

EM Pro DALI emergency Integral indicator




/54

IP54 sealed clear lens



/65

IP65 option

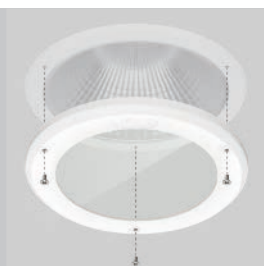

Bezel + lens



IP65/002/240

IP65 RAL 9010 bezel
Clear glass



IP65/008/240

IP65 RAL 9010 bezel
Opal polycarbonate



IP65/009/240

IP65 RAL 9010 bezel
Clear polycarbonate



Titan - AG Accessories



GF008 / GF010

Anti-tamper driver
Anti-tamper bit



BTWS001

Wireless Casambi
single wall switch



BTWS002

Wireless Casambi
twin wall switch

PV - PRODUCT VARIATIONS



PV - Contact Sales

Any RAL colour bezel




PV - Contact Sales

Choice of connectors




PV - Contact Sales

LS0H / LSF cable



PV - Contact Sales

Choice of modules and
drivers



PV - Contact Sales

High ambient
temperatures



PV - Contact Sales

RGBW colour change



PV - Contact Sales

Philips MasterConnect
wireless control



PV - Contact Sales

HubSense wireless
control

Thornhill Road Business Park
Tenter Fields, Dewsbury
West Yorkshire
WF12 9QT
+44 (0)1924 482777
www.gamma-uk.com



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.